


Cel-Fi GO 0 Mobile Installation


1 Install Outdoor Antenna

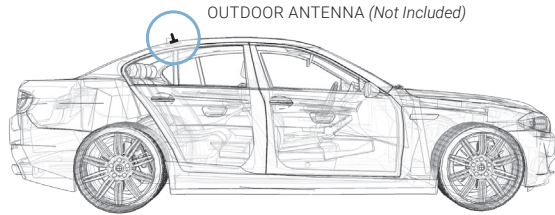

Mount your **Outdoor Antenna** on the exterior of the vehicle, towards the rear, according to its design, and the type of vehicle it's being used with. Make sure you consider the cable connection to the **Cel-Fi GO** unit with your location choice.


For best performance make sure there is 50cm of metal around the base of the antenna.

2 Install Indoor Antenna

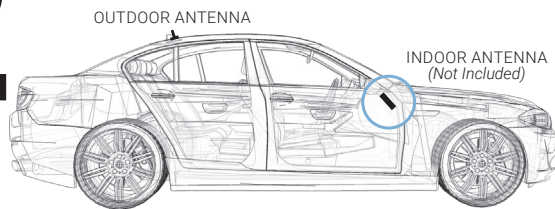

Install **Indoor Antenna** in the cab, towards the front, where coverage is needed. Ideally, there should be substantial material, like the metal of the roof, between the **Outdoor** and **Indoor Antennas**, to improve isolation.

3 Mount Cel-Fi GO

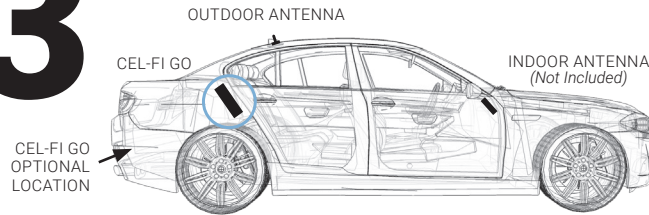



Find a good mounting location in your vehicle. Location should have airflow and be secure from contact with external objects.

Make sure the unit is within cable range of the 12V power supply on your vehicle.


Best to make sure all cable lengths support the intended mounting location BEFORE permanent mounting.

DO NOT plug in at this time.

4 Connect Outdoor & Indoor Antennas to the Cel-Fi GO Unit

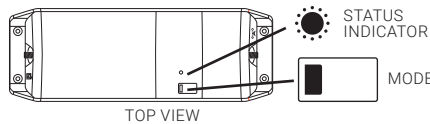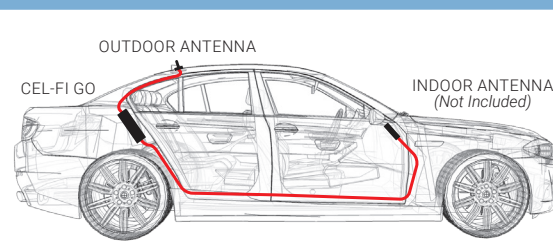

5 Plug in Cel-Fi GO & Select Mode

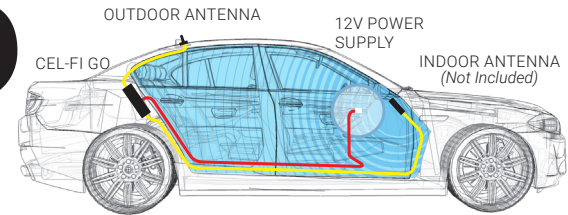

Press the **MODE** button on the unit to select desired scanning mode. Status Indicator will blink during the setup process, and may take a few minutes to complete.

Bluetooth (OPTIONAL: use your smartphone to select mode. Download the **Cel-Fi WAVE app**, and follow the on-screen instructions.)

4G LTE	MODE	STATUS INDICATOR	MODE SELECT BUTTON
STATUS INDICATOR LEGEND	AUTO		
Boosting 3G	3G		
Boosting 4G LTE	4G LTE		
Error*			
4G/4GX	MODE	STATUS INDICATOR	MODE SELECT BUTTON
STATUS INDICATOR LEGEND	AUTO		
Boosting 3G	3G		
Boosting 4G/4GX	4G/4GX		
Error*			

(*NOTE: if Error, go to troubleshooting at cel-fi.com/support)