




Product NO.		CAL10-191SA2-018	
REV	DESCRIPTION	DWN	DATE
RL 0	First issue	Gavin	2019/12/26
		APPROVEN	
		JIM.KING	

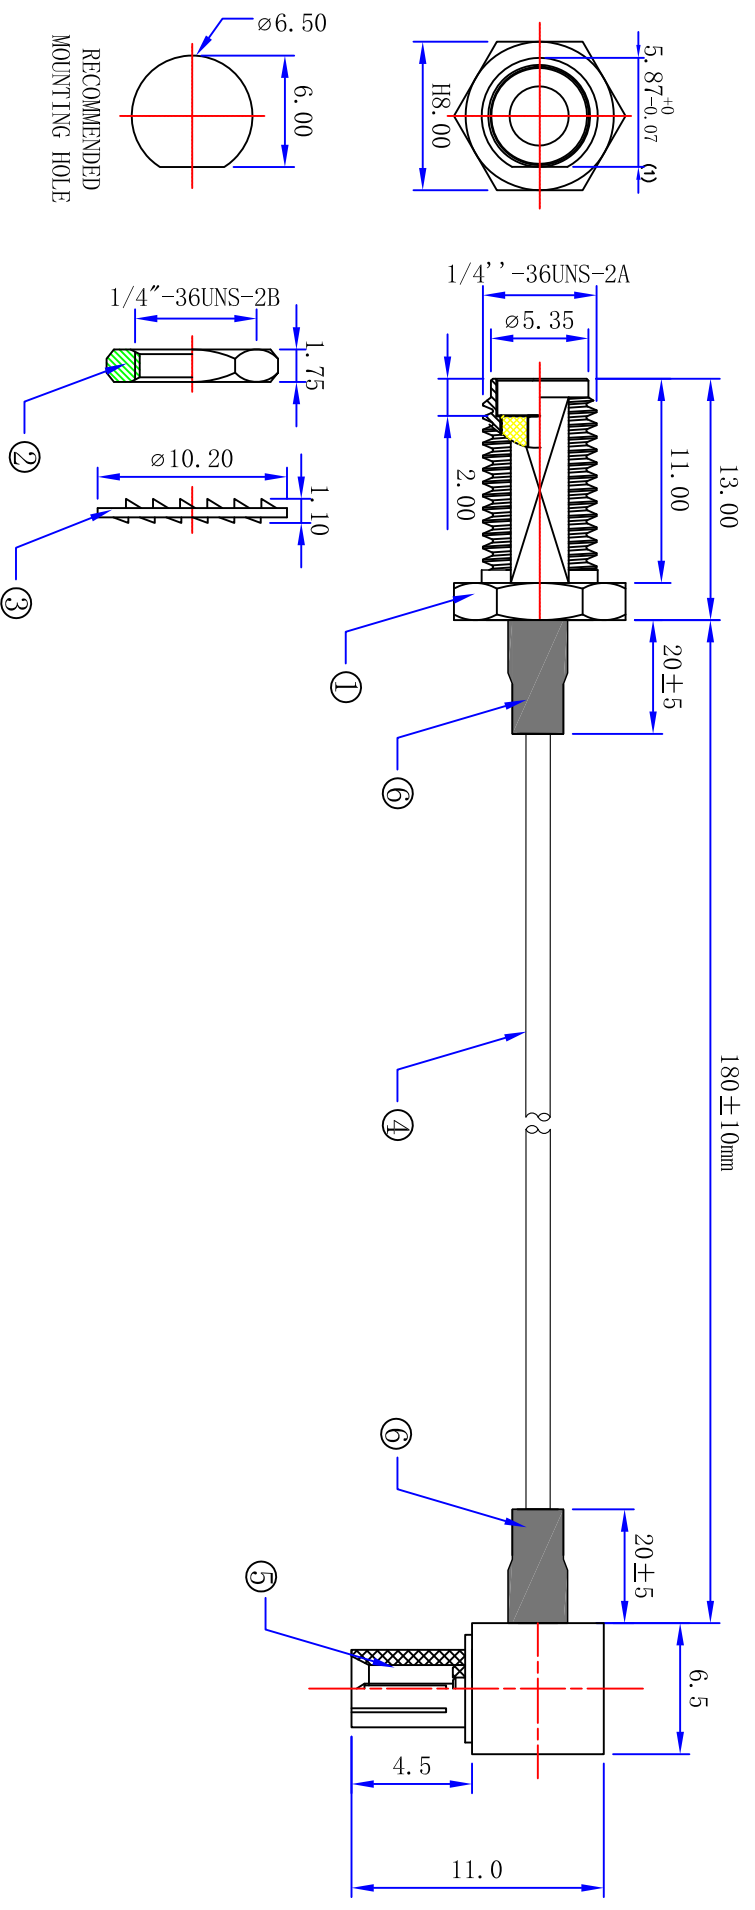

**Specifications**  
 Impedance: 50 Ohms  
 Frequency Range: DC~3G  
 VSWR: 1.3MAX  
 Working Voltage: 500V rms @ sea level  
 Insulation Resistance: 5000 Ohms min  
 Temperature Range: -40°C TO +125°C  
 Relative Temperature: ≤95% (40° C ± 2° C)

NO	DESCRIPTION	MATERIAL	FINISH	QTY
6	heat shrink tubing		Black	2
5	TS9 Plug	Brass	Nickel	1
4	Cable	LMR100	Black	1
3	Gasket	Brass	Gold	1
2	NUT	Brass	Gold	1
1	SMA Jack	Brass	Gold	1

-TOLERANCES- UNLESS OTHERWISE SPECIFIED			
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm		<b>PART DESCRIPTION:</b> SMA Jack TO TS9 Plug FOR LMR100 CABLE	
Appd:	JIM.KING	P/N:	CAL10-191SA2-018
Check:		Date	2019.12.26
Draw:	Gavin	Scale	Free
		Unit	MM
		Type	Z
		Page	1/1